

XXVI INTERNATIONAL SCIENTIFIC CONFERENCE

trans & MOTAUTO '18

PROCEEDINGS

ISSN 1313-5031 (Print), ISSN 2535-0307(Online)
YEAR I, USSUE 1 (3), SOFIA, BULGARIA 2018

SECTION I
TRANSPORT TECHNIQUES.
INVESTIGATION OF
ELEMENTS. VEHICLE
ENGINES.

27.06. – 30.06.2018
BURGAS, BULGARIA

Publisher: Scientific-technical union of mechanical engineering
„Industry-4.0”

INTERNATIONAL PROGRAM COMMITTEE

CHAIRMAN: Dr.h.c. Prof. DSc Petar Kolev, BG

Assoc. Prof. Aleksandar Kostikj, MK
Prof. Massimo Borghi, IT
Assoc. Prof. Andrey Ferenets, RU
Prof. Miho Mihov, BG
Prof. Angel Dimitrov, BG
Prof. Murat Dogruel, TR
Assoc. Prof. Beti Angelevska, MK
Assoc. Prof. Naser Lajqi, KO
Assoc. Prof. Boyko Gigov, BG
Assoc. Prof. Natalia Sidenko, LV
Prof. Dainis Berjoza, LV
Assoc. Prof. Natasa Tomic-Petrovic, RS
Prof. Dan Scarpete, RO
Prof. Nikolay Georgiev, BG
Prof. Daniela Todorova, BG
Prof. Nikolay Ovchenkov, RU
Prof. Emilia Andreeva-Moschen, AT
Prof. Oleg Sharkov, RU
Prof. Gordana Marunic, HR

Assoc. Prof. Pepo Yordanov, BG
Prof. Hristo Stanchev, BG
Acad. Polatbeg Zhunisbekov, KZ
Assoc. Prof. Igor Penkov, EE
Assoc. Prof. Rinat Kurmaev, RU
Prof. Igor Smirnov, UA
Prof. Rosen Ivanov, BG
Prof. Igor Taratorkin, RU
Prof. Teymuraz Kochadze, GE
Colonel Prof. Iliyan Lilov, BG
Prof. Vadim Zhmud, RU
Prof. Lech Sitnik, PL
Prof. Valyo Nikolov, BG
Prof. Ljudmila Boyko, UA
Prof. Wolfgang Fengler, DE
Prof. Madaminjon Aripdzanov, UZ
Assoc. Prof. Zoran Jovanovic, RS
Assoc. Prof. Martin Kendra, SK
Assoc. Prof. Ahmet H. Ertas, TR

CONTENTS

TRANSPORT TECHNIQUES. INVESTIGATION OF ELEMENTS. VEHICLE ENGINES

CALIBRATION OF AN ARTICULATED VEHICLE MODEL

Prof. dr hab. n.t. Adamiec-Wójcik I., Prof. dr hab. n.t. Wojciech S. 4

ДИНАМИЧЕСКАЯ НАГРУЖЕННОСТЬ ЭНЕРГОСИЛОВОГО БЛОКА ПРИ ПУСКЕ ДВИГАТЕЛЯ ВНУТРЕННЕГО СГОРАНИЯ, ОСНАЩЕННОГО СИСТЕМОЙ

Prof. Dsc. Taratorkin I., Prof. Dsc. Derzhanskii V., PhD Taratorkin A. , postgraduate Volkov A., Corresponding author - Taratorkin I. 8

AN ALTERNATIVE DESIGN OF TESTING BENCH FOR DYNAMIC WHEEL CORNERING FATIGUE TESTS

Sakota Zeljko PhD., Kostic Dimitrije 11

DESIGN AND ANALYSIS OF THE PROTECTIVE STRUCTURE OF AN INTERCITY BUS DURING A ROLLOVER ACCIDENT

M.Sc. Çolak N., M.Sc. Şahin U., M.Sc. Candaş A., Prof. M.Sc. İmrak C.E. PhD. 14

О КЛИНОВОМ СОПРЯЖЕНИИ ВО ВРАЩАТЕЛЬНОЙ КИНЕМАТИЧЕСКОЙ ПАРЕ

Assoc. Prof., Dr.Sc.(Eng.) Sharkov O.V., Prof., Dr.Sc.(Eng.) Koryagin S.I., Prof., Dr.Sc.(Eng.) Velikanov N.L. 18

THE METHOD OF NUMERICAL MODELING OF HYDRODYNAMICS AND HEAT EXCHANGE IN A CHANNEL WITH DISCRETE ROUGHNESS

Dr.sc.ing. Sidenko N., Dr. sc.ing. hab. prof. Dzelzitis E. 21

DEVELOPMENT AND RESEARCH OF TEMPERATURE CONTROL SYSTEM OF A HIGH-VOLTAGE BATTERY OF A PERSPECTIVE ELECTRIC VEHICLE

Ph.D., Ass. Prof. Kurmaev R.Kh., Umnitsyn A.A., Struchkov V.S., Ph.D., Ass. Prof. Karpukhin K.E., Liubimov I.A. 25

MODELING AND SIMULATION OF VEHICLE AIRBAG BEHAVIOUR IN CRASH

Associate Prof. J. Marzbanrad, PhD student - V. Rastegar 29

ПОВЫШЕНИЕ СКОРОСТНЫХ КАЧЕСТВ ТРАНСПОРТНОЙ ГУСЕНИЧНОЙ МАШИНЫ СОВЕРШЕНСТВОВАНИЕМ ДИНАМИЧЕСКИХ СВОЙСТВ СИСТЕМЫ УПРАВЛЕНИЯ ПОВОРОТОМ

PhD Gizatullin U. Prof. Dsc. Taratorkin I., Prof. Dsc. Derzhanskii V., PhD Taratorkin A. , postgraduate Volkov A., Corresponding author - Gizatullin U. 33

| | |
|--|----|
| MATHEMATICAL MODELING AND SIMULATION OF POWER UNIT WORKING ON MOTOR FUELS DERIVED FROM NATURAL GAS IN TOTAL LIFE CYCLE Eng. Mirenkova E., Assoc. Prof. D.Sc. Kozlov A., Assoc. Prof. Ph.D. Terenchenko A. | 37 |
| A RESEARCH ON THE STATIC STABILITY OF THE MAVS USING VIRTUAL TUNNELS M.Sc. Kambushev M. PhD., M.Sc. Biliderov S. PhD. | 41 |
| ANALYTICAL AND FINITE ELEMENT IN-PLANE VIBRATION ANALYSIS OF A GANTRY CRANE M.Sc. Şahin T., M.Sc. Candaş A., Prof. İmrak C.E. PhD. | 45 |
| MECHANICAL DESIGN AND FINITE ELEMENT ANALYSIS OF A 3 UNIT CUBESAT STRUCTURE BsC. Güvenç, C. C., BsC. Topcu B., and Ph.D. Tola C. | 48 |
| EFFECTS OF PROPELLANT PROPERTIES ON INTERNAL BALLISTIC PERFORMANCE RESULTS OF SOLID ROCKET MOTORS Ceyhun Tola, Ph.D. | 52 |
| THREE-DIMENSIONAL SIMULATION OF THERMAL STRESSES IN DISCS DURING AN AUTOMOTIVE BRAKING CYCLE M.Sc. Rouhi Moghanlou M., Assist. Prof. Saeidi Googarchin H. PhD. | 56 |
| NATURALLY ASPIRATED GASOLINE ENGINE UPGRADE WITH TURBOCHARGER - NUMERICAL INVESTIGATION OF CHANGE IN OPERATING PARAMETERS PhD. Mrzljak Vedran, Student Žarković Božica | 60 |
| LIQUID FUEL TEMPERATURE, PRESSURE AND INJECTION RATE INFLUENCE ON INJECTOR NOZZLE REYNOLDS NUMBER AND CONTRACTION COEFFICIENT PhD. Mrzljak Vedran, Student Žarković Božica, Prof. PhD. Prpić-Oršić Jasna | 64 |
| THE ANALYTICAL RESEARCH OF THE DYNAMIC LOADING EFFECT ON THE ROAD-HOLDING ABILITY CHARACTERISTIC SIGNS OF EARTH-MOVING MACHINE Cand. Eng. Sc., Associate Professor Shevchenko V., Post-graduate student Chaplygina A., Cand. Eng. Sc., Krasnokutsky V., Associate Professor Logvinov E. | 68 |
| РЕГИСТРАЦИЯ И КОНТРОЛ НА ИНФРАЧЕРВЕНОТО ИЗЛЪЧВАНЕ ЕМИТИРАНО ОТ АВИАЦИОННИТЕ ДВИГАТЕЛИ Инженер-физик Ташев В. Л, Главен асистент Манев А. П. | 73 |
| VEHICLES FOR THE FUTURE – DILLEMAS AND PERSPECTIVES Prof. Dr Nataša Tomić-Petrović | 76 |
| COMPARATIVE ANALYSIS OF LITHIUM-ION BATTERIES FOR EV/HEV APPLICATIONS M.Sc. Velev B. PhD. | 79 |
| CONSTRUCTIVE DESIGN OF A BELT CONVEYOR FOR A COAL MINE M.Sc. Solak A., M.Sc. Kalay E., Prof. Dr. Imrak E. | 83 |
| ВАКУУМНЫЕ ПОКРЫТИЯ ДЛЯ АЭРОКОСМИЧЕСКОЙ И АВИАЦИОННОЙ ТЕХНИКИ Канд.физ.-мат. наук Чекан Н.М., доц., док.техн.наук Овчинников Е.В., канд.техн.наук Акула И.П., доц., канд.техн.наук Эйсмонт Е.И. | 86 |
| МЕТОД ЗА ОРАЗМЕРЯВАНЕ И ИЗБОР НА ЕЛАСТИЧЕН СЪЕДИНИТЕЛ Assoc. Prof. M.Sc. Pandev G. PhD. | 91 |
| EXPERIMENTAL SIMULATION OF COMMON RAIL ELECTROMAGNETIC INJECTORS WEARING Dipl. eng. Yordanov N., Assoc. Prof. Kiril Hadjiev, PhD ,Assoc. Prof. Emiliyan Stankov, PhD | 95 |

LIQUID FUEL TEMPERATURE, PRESSURE AND INJECTION RATE INFLUENCE ON INJECTOR NOZZLE REYNOLDS NUMBER AND CONTRACTION COEFFICIENT

PhD. Mrzljak Vedran, Student Žarković Božica, Prof. PhD. Prpić-Oršić Jasna
 Faculty of Engineering, University of Rijeka, Vukovarska 58, 51000 Rijeka, Croatia
 E-mail: vedran.mrzljak@riteh.hr, bozica.zarkovic@gmail.com, jasna.prpic-orsic@riteh.hr

Abstract: The influences of liquid fuel temperature, pressure and injection rate on fuel contraction coefficient and Reynolds number during a fuel injection were investigated in this paper. Nozzle geometry parameters remained constant during the whole numerical analysis. Calculations were performed with a standard diesel fuel D2. Increase in liquid fuel temperature cause increase in fuel contraction coefficient. Fuel temperature increase resulted in a slight increase in contraction coefficient at low fuel pressures, while at high fuel pressures increase in fuel temperature causes significant increase in fuel contraction coefficient. Increase of fuel pressure resulted in a decrease in liquid fuel contraction coefficient, for every fuel injection rate and for every fuel temperature. Reynolds number increases with an increase in fuel temperature and also with an increase in fuel injection rate. The main goal of presented analysis is to be usable not only for one fuel injector and its nozzles, but for a large number of the fuel injectors and for many liquid fuels.

KEYWORDS: LIQUID FUEL, FUEL INJECTOR NOZZLE, CONTRACTION COEFFICIENT, REYNOLDS NUMBER

1. Introduction

In internal combustion engine fuel temperature, pressure and injection rate as well as the injector nozzle geometry strongly affect the fuel atomization process. A liquid fuel atomization process has a strong influence on the engine combustion process and on exhaust emissions. However, due to the small length and time scales during the fuel injection process, it is still a challenge to capture and explain the physics and influences behind those processes.

Internal nozzle flow influence on spray atomization along with fuel properties and injection rates was investigated by several authors in the past [1], [2]. Newer investigations about this topic is presented by Madero and Axelbaum [3] which was investigated fuel spray breakup and structure of spray flames for low-volatility wet fuels. Greenberg [4] investigated the impact of the initial droplet size distribution on the behavior of an edge flame. Nozzle configuration effects on internal flow and primary spray breakup for flash boiling fuel sprays was analyzed by Wu et al. [5] while Abianeh et al. [6] investigated the nozzle flow influence and characteristics on multi-component fuel spray evaporation process. Experimental study on fuel spray characteristics under atmospheric and pressurized cross-flow conditions presented Guo et al. [7].

The impact of the injector nozzle geometry and fuel properties on fuel injection, fuel atomization and evaporation processes must be involved in any detail internal combustion engine simulation, as the one presented in [8] for a high speed direct injection turbocharged diesel engine. The same impact is inevitable in simulations of large marine two-stroke slow speed diesel engines [9].

2. Liquid fuel contraction coefficient

Liquid fuel contraction is liquid stream constriction which occurs because the fluid streamlines cannot abruptly change direction. For the fuel injector nozzle, the fluid streamlines are unable to closely follow the sharp angle in the nozzle wall. Maximum contraction is the place in a liquid fuel stream where the diameter of the stream is the lowest. The maximum contraction takes place slightly downstream of the fuel injector nozzle, Fig. 1.

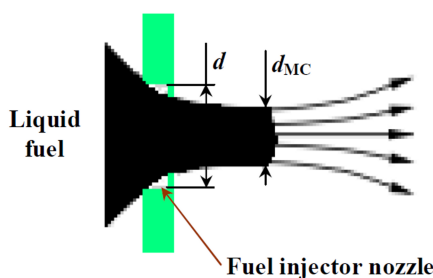


Fig. 1. Liquid fuel contraction coefficient definition for fuel injector nozzle

According to Fig. 1, the liquid fuel contraction coefficient for the fuel injector nozzle is defined as a ratio of liquid fuel stream diameter at maximum contraction point and the nozzle diameter:

$$C_d = \frac{d_{MC}}{d} \quad (1)$$

where: C_d = liquid fuel contraction coefficient, d_{MC} = liquid fuel stream diameter at maximum contraction point, d = nozzle diameter.

Liquid fuel contraction coefficient value is always lower than 1 and depends on the fuel stream parameters (pressure, temperature and injection rate) as well as on nozzle geometry.

3. Injector nozzle geometry parameters

The main goal of presented mathematical model in this analysis is to be usable not only for one fuel injector and its nozzles, but for a large number of the fuel injectors and for many liquid fuels. As analysis baseline is used fuel injector DLLA 775 from [10].

Three fuel injector nozzle geometry parameters which influenced liquid fuel contraction and Reynolds number are nozzle diameter (d), nozzle length (l) and nozzle inlet radius (r). The nozzle inlet radius value is usually shown as a ratio of nozzle diameter (r/d), what was also adopted in presented analysis.

In analysis were selected nozzle geometry parameters similar to ones for fuel injector DLLA 775 [10], which are the most used in practice. Selected nozzle geometry parameters remain unchanged throughout the analysis.

The variables which strongly influenced fuel contraction coefficient and Reynolds number are fuel pressure, fuel temperature and fuel injection rate. Those variables were varied.

4. Liquid diesel fuel used in the analysis

In analysis was used diesel fuel D2, which main characteristics and specifications are presented in Table 1. Although the analysis is made with diesel fuel D2, the mathematical description of the liquid fuel contraction coefficient and the Reynolds number allows the usage of any standard or alternative liquid fuel.

Table 1. Main specifications of diesel fuel D2 [11]

| Liquid diesel fuel D2 property | Value |
|--------------------------------|---|
| Sulfur content | 0.3 percentage of mass |
| Molecular mass | 198 kg/kmol |
| Density at 15.5 °C | 0.842 g/cm ³ |
| Kinematic viscosity at 38 °C | 2.84 · 10 ⁻⁶ m ² /s |
| Critical pressure | 20.9 bar |
| Critical temperature | 453 °C |
| Boiling point | 266 °C |
| Flash point | 75 °C |
| Aniline point | 71.7 °C |

5. Liquid diesel fuel D2 thermodynamics properties necessary for analysis

5.1. Density of liquid diesel fuel D2

Liquid diesel fuel D2 density dependence on the fuel pressure and temperature is given by the following equation [11]:

$$\rho = \rho_0 \cdot \left(1 + \frac{p}{E} - \frac{\Delta t}{A}\right) \quad (2)$$

where: ρ = liquid fuel current density (g/cm^3), $\rho_0 = 0.845 \text{ g/cm}^3$ (liquid fuel density on the environmental pressure = 1 bar and temperature = 25 °C), p = liquid fuel current pressure (Pa), $E = 19.6 \cdot 10^8 \text{ Pa}$ (liquid fuel elasticity module), Δt = liquid fuel temperature above the environment temperature, $A = 1350 \text{ }^\circ\text{C}$ (reciprocal value of the liquid fuel thermal expansion coefficient).

5.2. Dynamic viscosity of liquid diesel fuel D2

Liquid diesel fuel D2 dynamic viscosity change can be calculated by a second degree polynomial [11]:

$$\mu = A(t) + B_1(t) \cdot p + B_2(t) \cdot p^2 \quad (3)$$

$$A(t) = 5.92723 \cdot 10^{-5} + 0.0030803 \cdot \exp\left(-\frac{t-17.45789}{13.98351}\right) + 0.0036761 \cdot \exp\left(-\frac{t-17.45789}{77.77}\right) \quad (4)$$

$$B_1(t) = 8.02964 \cdot 10^{-6} - 1.17256 \cdot 10^{-7} \cdot t + 3.82129 \cdot 10^{-10} \cdot t^2 + 1.30035 \cdot 10^{-12} \cdot t^3 \quad (5)$$

$$B_2(t) = 2.21756 \cdot 10^{-8} \cdot \exp\left(-\frac{t-20}{9.126829}\right) + 5.85318 \cdot 10^{-9} \cdot \exp\left(-\frac{t-20}{51.453}\right) \quad (6)$$

where: p = liquid fuel current pressure (bar), t = liquid fuel current temperature ($^\circ\text{C}$), μ = liquid fuel current dynamic viscosity ($\text{kg/m}\cdot\text{s}$).

6. Liquid fuel Reynolds number and contraction coefficient

The Reynolds number for the fuel injector nozzle is defined by the expression:

$$\text{Re} = \frac{\rho \cdot v_i \cdot d \cdot 10^{-3}}{\mu} \quad (7)$$

where: ρ = liquid fuel density (kg/m^3), v_i = liquid fuel injection rate (m/s), d = nozzle diameter (mm), μ = liquid fuel dynamic viscosity ($\text{kg/m}\cdot\text{s}$).

Reynolds number coefficient f used in the contraction coefficient equation was calculated by the equation:

$$f = \text{Max} \left(0.316 \cdot \text{Re}^{-0.25}, \frac{64}{\text{Re}}\right) \quad (8)$$

Contraction loss coefficient K_{in} is a function of nozzle inlet radius r and nozzle diameter d ratio. According to [12] contraction loss coefficient K_{in} can be defined by the following polynomial:

$$K_{in} = 162.52076 \cdot (r/d)^4 - 143.12017 \cdot (r/d)^3 + 47.86559 \cdot (r/d)^2 - 7.50909 \cdot (r/d) + 0.51243 \quad (9)$$

where: K_{in} = contraction loss coefficient (-), r = nozzle inlet radius (mm), d = nozzle diameter (mm).

Flow in the fuel injector nozzle is turbulent with the possibility of cavitation occurrence. Taking into account the turbulent flow in the fuel injector nozzle without the occurrence of cavitation [12], the liquid fuel contraction coefficient can be defined as:

$$C_d = \frac{1}{\sqrt{K_{in} + f \cdot \frac{l}{d} + 1}} \quad (10)$$

where: C_d = liquid fuel contraction coefficient (-), K_{in} = contraction loss coefficient (-), f = Reynolds number coefficient (-), l = nozzle length (mm), d = nozzle diameter (mm).

7. Mathematical model results and discussion

Change in liquid fuel contraction coefficient for different fuel injection rates and temperatures, at fuel pressure of 800 bars, was presented in Fig. 2. This figure, as all the other figures through this paper, was obtained by using nozzle geometry and fuel characteristics presented in boldface legend in the figure.

From Fig. 2 can be seen that contraction coefficient increases with the increase in fuel temperature. During the injection rate increase, at any fuel temperature, increase in contraction coefficient is significant for low injection rates (from 10 m/s to 100 m/s). Further increase in the fuel injection rate (above 100 m/s) causes low, almost negligible increase in contraction coefficient, for any fuel temperature.

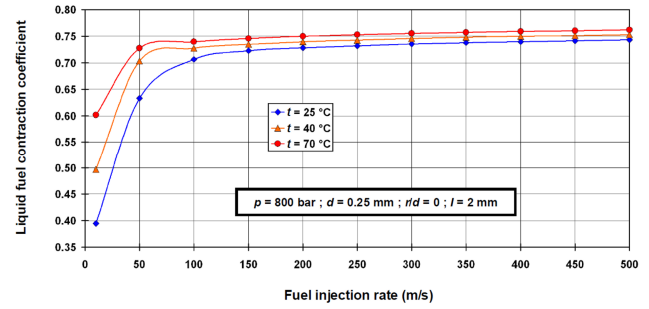


Fig. 2. Change in liquid fuel contraction coefficient for different fuel injection rates and temperatures ($p = 800 \text{ bars}$)

For the same fuel injector nozzle operating parameters and fuel pressure as in Fig. 2, change in Reynolds number which is calculated according to equation (7) is presented in Fig. 3.

For any fuel injection rate, Reynolds number increases with an increase in fuel temperature. Increase in fuel injection rate also increases Reynolds number, for every fuel temperature. During the increase in injection rate, the increase in Reynolds number is as higher as the fuel temperature increase, so the highest Reynolds numbers were obtained for the highest observed fuel temperature and injection rate. Dispersion of Reynolds numbers for a various fuel temperatures became as higher as fuel injection rate increases.

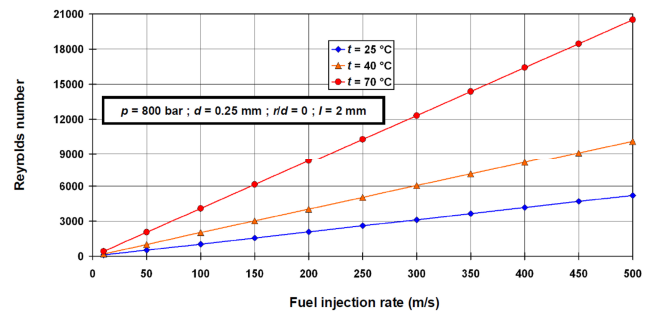


Fig. 3. Change in Reynolds number for different fuel injection rates and temperatures ($p = 800 \text{ bars}$)

Change in liquid fuel contraction coefficient for different fuel injection rates and temperatures, for the same fuel injector nozzle operating parameters as in Fig. 2, but with increased fuel pressure (from 800 bars to 2000 bar) is presented in Fig. 4.

For any fuel pressure is valid a fact that the increase in fuel temperature causes an increase in contraction coefficient, for any fuel injection rate. Increase in fuel injection rate causes a different change of contraction coefficient for low fuel pressures (Fig. 2) in comparison with high fuel pressures (Fig. 4).

At high fuel pressures, increases in the fuel injection rate (from 10 m/s to 500 m/s) causes a continuous and significant increase in contraction coefficient, when the fuel is on environmental temperature (25 °C). For higher fuel temperatures, an increase in contraction coefficient during the increase in injection rate is significant only for lower injection rates (from 10 m/s to 250 m/s).

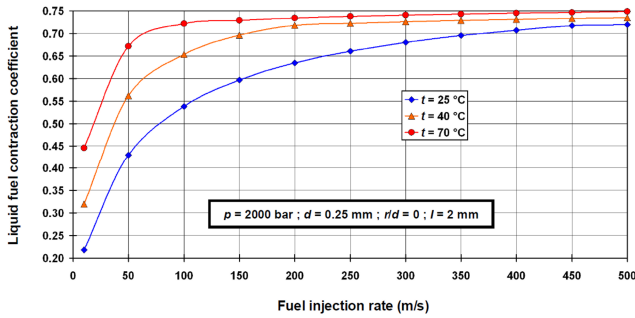


Fig. 4. Change in liquid fuel contraction coefficient for different fuel injection rates and temperatures ($p = 2000$ bar)

Change in Reynolds number for different fuel injection rates and temperatures at fuel pressure of 2000 bar is presented in Fig. 5. When compared Fig. 5 (fuel pressure 2000 bar) and Fig. 3 (fuel pressure 800 bar) it can be concluded that a change in Reynolds number during the change in the fuel injection rate and fuel temperature has the same trend for every fuel pressure.

The only significant influence of fuel pressure on Reynolds number can be seen in the Reynolds number value. Increase in fuel pressure causes decrease in Reynolds number, for the same fuel injector nozzle operating parameters. At fuel pressure of 2000 bar, Fig. 5, maximum Reynolds number does not exceed $Re = 7500$, while at fuel pressure of 800 bars, Fig. 3, maximum Reynolds number reaches almost $Re = 21000$. Again, for both fuel pressures, the maximum Reynolds number was obtained at the highest fuel temperature and at the highest injection rate.

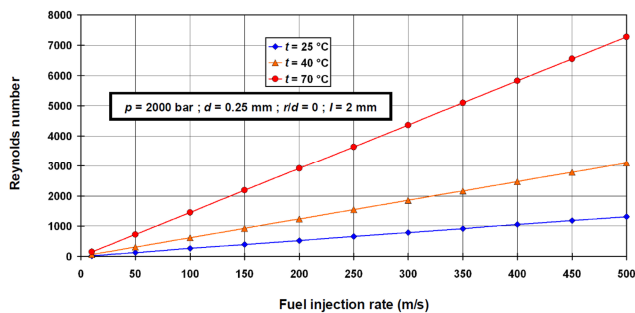


Fig. 5. Change in Reynolds number for different fuel injection rates and temperatures ($p = 2000$ bar)

Change in liquid fuel contraction coefficient for different fuel pressures and injection rates at a fuel temperature of 25 °C, is presented in Fig. 6.

Increase in fuel pressure resulted with a decrease in liquid fuel contraction coefficient, for every fuel injection rate, but the decrease trends are not the same at each injection rate. For the lowest observed injection rate (100 m/s) decrease in contraction coefficient, during the increase in fuel pressure is the sharpest. Increase in fuel injection rate causes that decrease in contraction coefficient, during the fuel pressure increase, becomes less and less sharp. For low fuel pressures, dispersion of contraction coefficients for every observed injection rate is low, while it becomes bigger and bigger as fuel pressure increases.

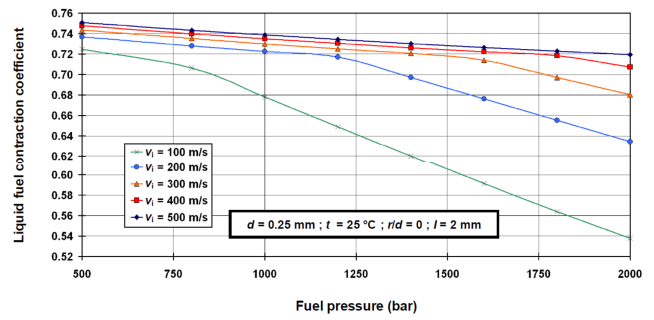


Fig. 6. Change in liquid fuel contraction coefficient for different fuel pressures and injection rates ($t = 25$ °C)

Change in liquid fuel contraction coefficient for different fuel pressures and injection rates, for the same fuel injector nozzle operating parameters, but for increased fuel temperatures was presented in Fig. 7 for fuel temperature of 40 °C and in Fig. 8 for fuel temperature of 70 °C.

As in Fig. 6, increase of fuel pressure resulted in a decrease in liquid fuel contraction coefficient, for every fuel injection rate, and the decrease is the highest for the lowest observed fuel injection rate (100 m/s).

When compared Fig. 6 and Fig. 7, it can be noted that the increase in fuel temperature from 25 °C to 40 °C resulted in a slight increase in contraction coefficient at low fuel pressures, while at high fuel pressures increase in fuel temperature causes significant increase in fuel contraction coefficient, for any injection rate. This conclusion and comparison with lower fuel temperature is also valid when fuel temperature is the highest observed (70 °C, Fig. 8).

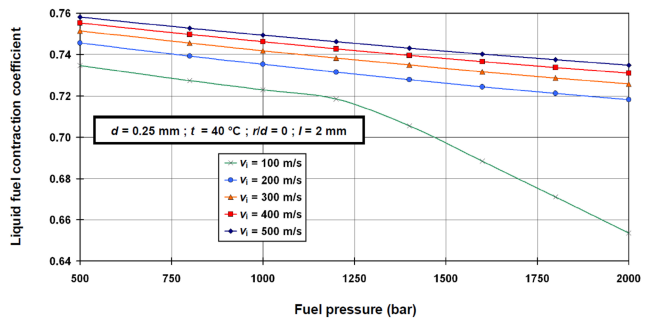


Fig. 7. Change in liquid fuel contraction coefficient for different fuel pressures and injection rates ($t = 40$ °C)

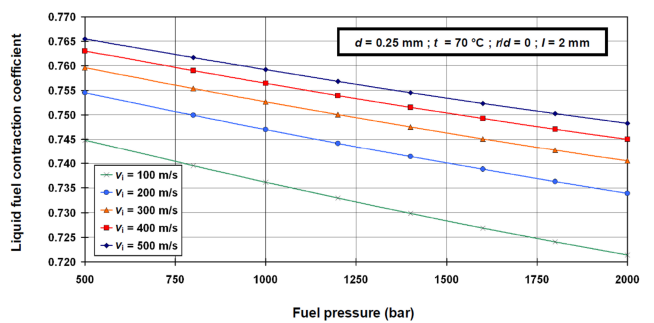


Fig. 8. Change in liquid fuel contraction coefficient for different fuel pressures and injection rates ($t = 70$ °C)

Change in Reynolds number for different fuel pressures and injection rates is presented in Fig. 9 and Fig. 10. Injector nozzle geometry parameters remains the same in all figures, while the fuel temperature was varied and amounts 25 °C - Fig. 9 and 70 °C - Fig. 10.

The most of the conclusions for Reynolds number change are the same at each fuel temperature. Increase in fuel pressure causes decrease in Reynolds number for every fuel temperature and injection rate. The decrease in Reynolds number during the fuel pressure increase is the highest for the highest fuel injection rates, at

any fuel temperature. Dispersion of Reynolds numbers for different fuel injection rates are the highest at the lowest fuel pressures while the same dispersion is the lowest for the highest observed fuel pressures, what is a valid conclusion for every fuel temperature.

Change in fuel temperature influences only the Reynolds number value. For every fuel temperature, the highest Reynolds numbers were obtained at the lowest fuel pressure and at the highest fuel injection rate. Increase in fuel temperature resulted in an increase in Reynolds number.

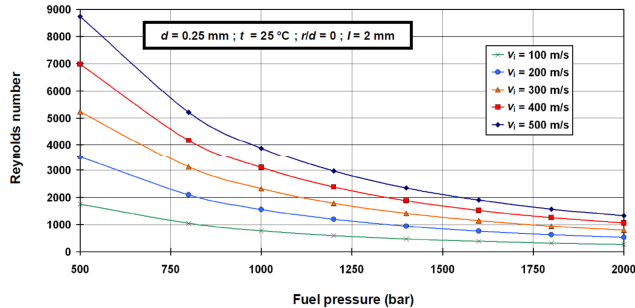


Fig. 9. Change in Reynolds number for different fuel pressures and injection rates ($t = 25\text{ }^{\circ}\text{C}$)

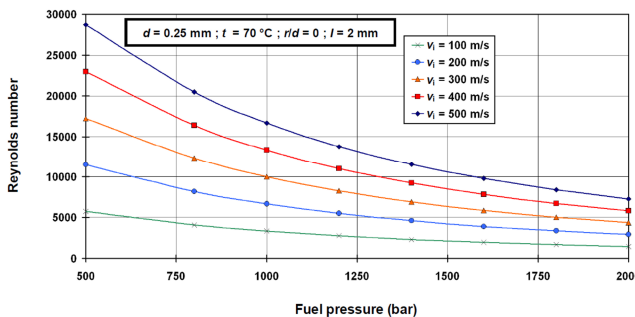


Fig. 10. Change in Reynolds number for different fuel pressures and injection rates ($t = 70\text{ }^{\circ}\text{C}$)

8. Conclusion

In this paper were investigated influences of liquid fuel temperature, pressure and injection rate on fuel contraction coefficient and Reynolds number during fuel injection. Nozzle geometry parameters remained constant during the whole numerical analysis. As expected, fuel temperature, pressure and injection rate are very influential parameters which can significantly change the fuel contraction coefficient and Reynolds number. Calculations were performed with a standard diesel fuel D2.

Increase in liquid fuel temperature cause increase in fuel contraction coefficient. Fuel temperature increase resulted in a slight increase in contraction coefficient at low fuel pressures, while at high fuel pressures increase in fuel temperature causes significant increase in fuel contraction coefficient. To obtain contraction coefficient as high as possible, for low fuel pressures is advisable to increase the fuel injection rate, but not much higher than 100 m/s. At high fuel pressures, increases in the fuel injection rate causes a continuous and significant increase in contraction coefficient when the fuel is on environmental temperature ($25\text{ }^{\circ}\text{C}$), while for higher fuel temperatures increase in contraction coefficient during the increase in injection rate is significant only for lower injection rates. Increase of fuel pressure resulted in a decrease in liquid fuel contraction coefficient, for every fuel injection rate and for every fuel temperature.

Reynolds number increases with an increase in fuel temperature and also with an increase in fuel injection rate. During the increase in injection rate, the increase in Reynolds number is as high as the fuel temperature increase, so the highest Reynolds numbers were obtained for the highest observed fuel temperature and injection rate. Change in Reynolds number during the change in the fuel injection rate and fuel temperature has the same trend for every fuel

pressure. For every fuel temperature, the highest Reynolds numbers were obtained at the lowest fuel pressure and at the highest fuel injection rate. Increase in fuel pressure causes decrease in Reynolds number for every fuel temperature and injection rate.

The main goal of presented analysis is to be usable not only for one fuel injector and its nozzles, but for a large number of the fuel injectors and for many liquid fuels. Future research will be based on investigations of the same fuel and fuel injector operating parameters for alternative fuels and its comparison with presented ones for a standard diesel fuel.

9. Acknowledgment

This work was supported by the University of Rijeka (contract no. 13.09.1.1.05) and Croatian Science Foundation-project 8722.

10. References

- [1] Knox-Kelec, A.L., Farrell, P.V.: *Internal Flow in a Scale Model of a Diesel Fuel Injector nozzle*, SAE Paper 922308, 1992. (doi:10.4271/922308)
- [2] Chaves, H., Knapp, M., Kubitzek, A., Obermeier, F., Schneider, T.: *Experimental Study of Cavitation in the Nozzle Hole of Diesel Injectors Using Transparent nozzles*, SAE Technical paper 950290, 1995. (doi:10.4271/950290)
- [3] Madero, J. E., Axelbaum, R. L.: *Spray breakup and structure of spray flames for low-volatility wet fuels*, Combustion and Flame, 180, p. 102–109, 2017. (doi:10.1016/j.combustflame.2017.02.029)
- [4] Greenberg, J. B.: *Droplet size distribution effects in an edge flame with a fuel spray*, Combustion and Flame, 179, p. 228–237, 2017. (doi:10.1016/j.combustflame.2017.02.002)
- [5] Wu, S., Xu, M., Hung, D. L. S., Pan, H.: *Effects of nozzle configuration on internal flow and primary jet breakup of flash boiling fuel sprays*, International Journal of Heat and Mass Transfer, 110, p. 730–738, 2017. (doi:10.1016/j.ijheatmasstransfer.2017.03.073)
- [6] Abianeh, O. S., Chen, C. P., Mahalingam, S.: *Numerical modeling of multi-component fuel spray evaporation process*, International Journal of Heat and Mass Transfer, 69, p. 44–53, 2014. (doi:10.1016/j.ijheatmasstransfer.2013.10.007)
- [7] Guo, M., Nishida, K., Ogata, Y., Wu, C., Fan, Q.: *Experimental study on fuel spray characteristics under atmospheric and pressurized cross-flow conditions, second report: Spray distortion, spray area, and spray volume*, Fuel, 206, p. 401–408, 2017. (doi:10.1016/j.fuel.2017.05.088)
- [8] Mrzljak, V., Medica, V., Bukovac, O.: *Volume agglomeration process in quasi-dimensional direct injection diesel engine numerical model*, Energy, 115, p. 658–667, 2016. (doi:10.1016/j.energy.2016.09.055)
- [9] Mrzljak, V., Medica, V., Bukovac, O.: *Simulation of a Two-Stroke Slow Speed Diesel Engine Using a Quasi-Dimensional Model*, Transactions of Famena, 2, p. 35–44, 2016. (doi:10.21278/TOF.40203)
- [10] Škifić, N.: *Influence analysis of engine equipment parameters on diesel engine characteristics*, Doctoral Thesis, Rijeka, University of Rijeka, 2003.
- [11] Cvetič, M.: *Combustion modeling in direct injection diesel engine based on fuel injection rate*, Doctoral thesis, University of Belgrade, Belgrade, 2000.
- [12] Von Kuensberg Sarre, C., Song-Chang, K., D. Reitz, R.: *Modeling the effects of injector nozzle geometry on diesel sprays*, SAE paper 1999-01-0912, 1999. (doi:10.4271/1999-01-0912)